


CFM

CARTRIDGES FILLING



Cartridge

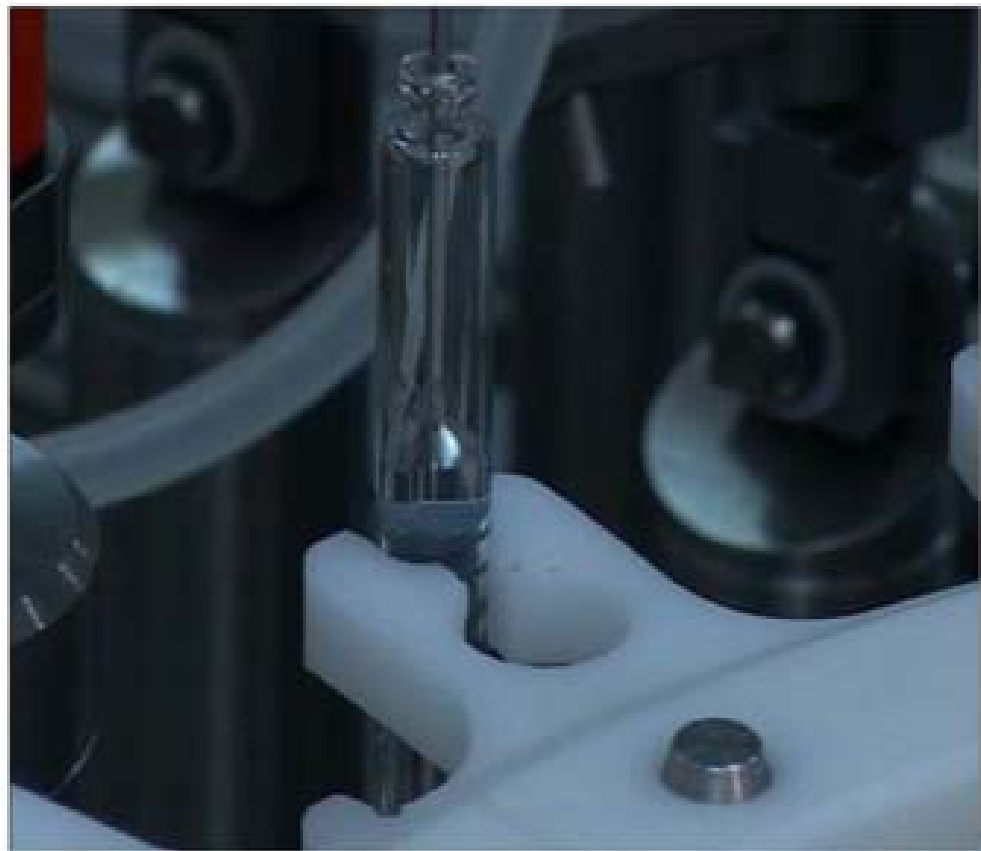

The CFM is an automatic machine that can be connected directly to the sterilization tunnel or is available in "STAND ALONE" version. This machine is designed for filling and closing of cartridges of different sizes with a high degree of accuracy and reliability.


The machine has been designed to be both highly functional and very easy to clean. All metallic parts are manufactured in AISI 304 Stainless Steel with the exception of contact parts which are in AISI 316L stainless steel. The metallic parts have a mirror polished finish.

Preliminary technical data

Production speed: from 20 up to 600 BpM
 Electrical power: 4kW
 Comp. air pressure: At least 6 Bar constant
 Comp. air consumption: 100/150 NL/h
 Standard Power Supply:
 400V/ 50-60 Hz / 3 Phase + N + T



Similar machine layout

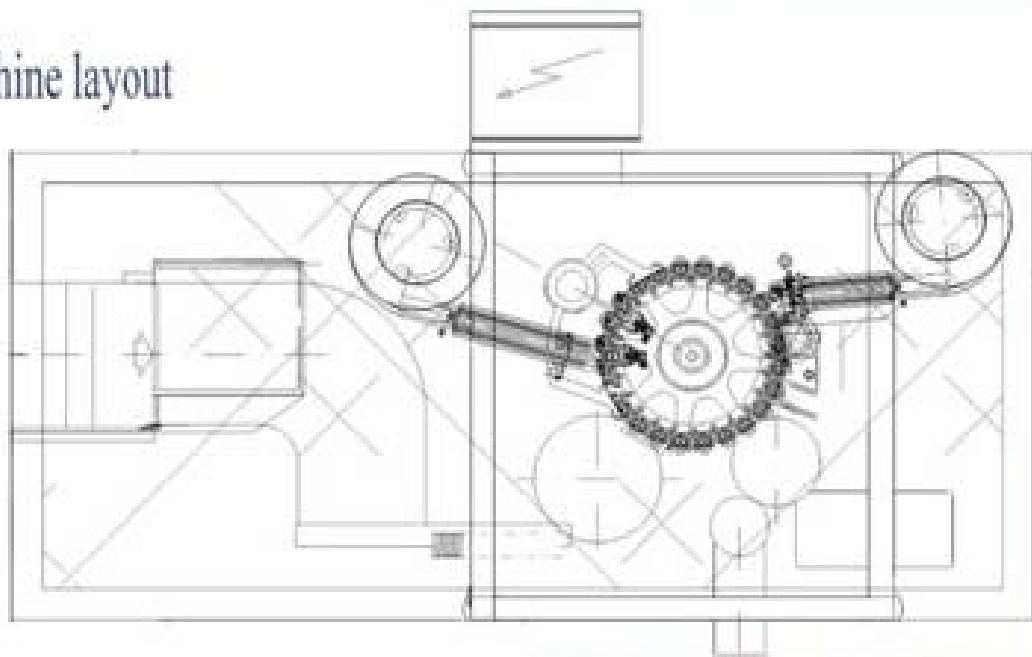

G.F. S.p.A.

Via T. Edison, 3 - 43045 Rubbiano fraz. Solignano (Parma) - Italy
 Tel. +39 0525 300311 - Fax +39 0525 300350
 Internet: <http://www.gf-industries.it> - E-mail: gfe@gfe.it

